

TOMBO BRAND

M.G. Mighty Cover



Pre-molded pipe covering made from rockwool bonded with phenolic resin. ALK type (with facing of aluminium foil reinforced with kraft paper) is available on request. Used for all types of heated and/or cooled piping in process industries and buildings.




PHYSICAL PROPERTIES

Density (Kg/m ³)	90			
Service Temperature (°C)	Up to 650 °C			
Thickness (mm)	20, 25, 30, 40, 50, 65, 75, 100			
Length (mm)	1,000			
Nominal Pipe Size	NPS (inch)	ID (mm)	NPS (inch)	ID (mm)
	1/2	22	14	356
	3/4	27	16	406
	1	34	18	457
	1-1/4	43	20	508
	1-1/2	49	22	559
	2	61	24	610
	2-1/2	76	26	660
	3	89	28	711
	3-1/2	102	30	762
	4	114	32	813
	5	140	34	864
	6	165	36	914
8	216			
10	276			
12	319			

Thermal Conductivity : W/m.K (kcal/m.h. °C)	
100 °C	
200 °C	
300 °C	
400 °C	

- Other densities and sizes (in ANSI) also are available on request.
- Available thickness are not for all sizes, please consult before order.
- Equivalent to ASTM C 547 Type III, JIS A 9504

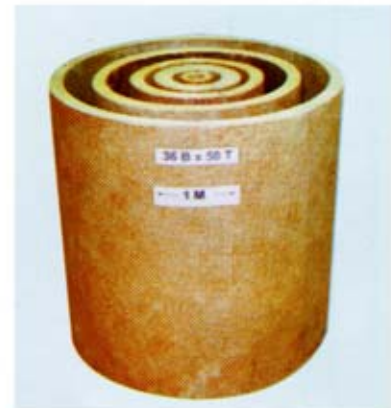

TOMBO BRAND

M.G. Elbow Cover

Molded and prefabricated cover for elbow. Ready for us at job site. Superior thermal properties, easier application, less installation time and man power cost compared with conventional job site fabricated elbow cover.



PHYSICAL PROPERTIES

Density (kg/m ³)	150	
Service Temperature (°C)	Up to 700 °C	
Thickness (mm)	25, 30, 40, 50, 65, 75, 100	
Nominal Pipe Size	NPS (inch)	ID (mm)
	2	61
	2-1/2	76
	3	89
	3-1/2	102
	4	114
	5	141
	6	165
	8	216
	10	267
	12	319
	14	356
	16	406
18	457	
20	508	

- Other densities and sizes also are available on request.
- Available thickness are not for all sizes, please consult before order.